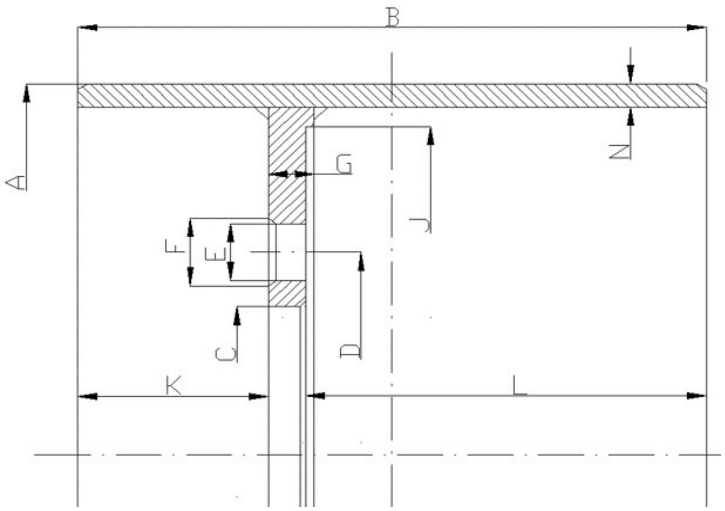
# Technical datasheet for Press on wheels for press-on tires (POW)

| | | | |
|---|---|---|---|
| A | Rim diameter | | mm |
| B | Rim width | | mm |
| N | Rim thickness | | mm |
| C | Central bore | | mm |
| D | PCD | | mm |
| - | Number of holes | | |
| E | Stud hole dia | | mm |
| F | Countersink dia | | mm |
| r | Radius | | mm |
| β | Angle | | ° |
| K | Distance from FF to nave | | mm |
| L | Distance from LF to nave | | mm |
| G | Nave thickness | | mm |
| J | Skimming dia | | mm |
| | Color (indicate RAL code if not black primer) | | |

| | | | |
|---|---|---|---|
| Wheel size | | Tire size | |
| Vehicle model | | | |
| Wheel identification number | | Qtty | |












tick if there is gusset-reinforcement

☐

| ○ straight | ○ one side spherical | ○ one side conical | ○ both sides spherical | ○ both sides conical |
|---|---|---|---|---|
|  |  |  |  |  |